

Continental[®]

BATTERIES

DATA SHEET

65-CS

PART # 65-CS
 BCI 65
 VOLTAGE 12V
 Ah 77



PHYSICAL SPECIFICATIONS


| Battery Type | Weight | Dimensions (L x W x H) | Container Material | Cover Material | Separator Material | Handle Option |
|--------------|----------------------|---|--------------------|----------------|--------------------|---------------|
| Flooded | 44.7 lbs 20.3 kgs | 11.06 x 7.42 x 7.55 " 280.9 x 188.5 x 191.8 mm | Polypropylene | Polypropylene | Polyethylene | Yes |

ELECTRICAL SPECIFICATIONS

| Nominal Voltage | SAE CCA (-18°C/0°F) | SAE CA (0°C/32°F) | SAE RC (27°C/80°F) | Ref. Ah Capacity 20 Hr | Battery Terminal Type | Electrolyte Specific Gravity Range |
|-----------------|---------------------|-------------------|--------------------|------------------------|-----------------------|------------------------------------|
| 12.6 V | 750 A | 875 A | 140 Min | 77 Ah | Top Post SAE Type A | 1.270-1.300 |

MISC SPECIFICATIONS

| | |
|---------------------------|------------------|
| Maximum Discharge Current | 1000 A (5 sec) |
| Positive Grid Alloy | Lead Calcium Tin |
| Negative Grid Alloy | Lead Calcium |
| Terminal Polarity | + - |

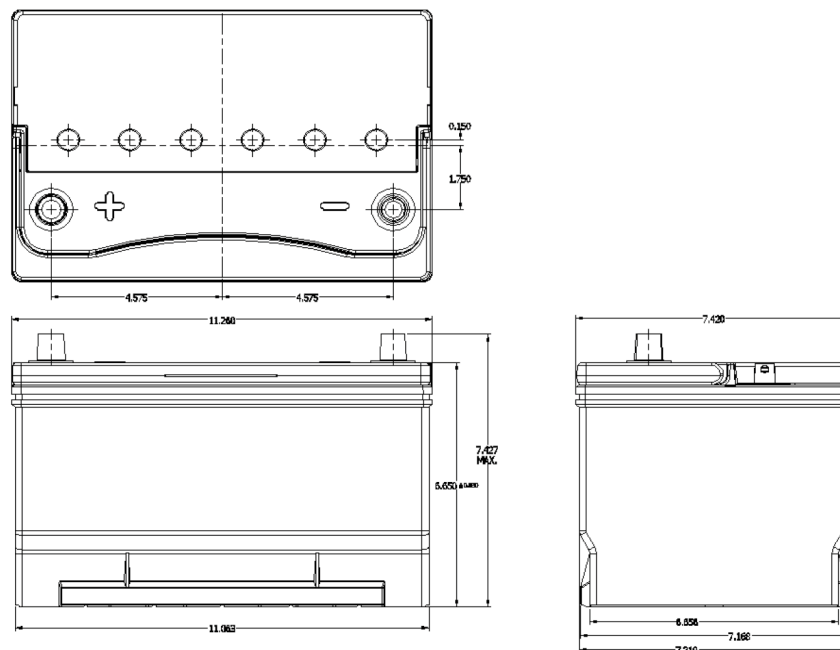

WWW.GOCBS.COM

